



## HA41 RTJ PRO



### PERFORMANCE & EASE OF USE

- Outstanding rough terrain driving features: 4 wheel drive and steer, oscillating axle
- Up to 4 simultaneous, proportional movements
- The smallest turning radius on the market
- Continuous outreach control

### OPTIMIZED SERVICEABILITY

- Exclusive modular basket easy and quick to repair
- Easy access to all components
- Self-diagnosis tool integrated on the lower control box

### BEST SAFETY FEELING


- Haulotte Activ'Shield Bar 2.0

# HA41 RTJ PRO

## ROUGH TERRAIN ARTICULATING BOOMS

### TECHNICAL DATA

HA41 RTJ PRO 4WD / 4WS		
Working height	ارتفاع دسترسی	41.5 m
Platform height	ارتفاع تا کف سبد	39.5 m
Horizontal outreach	دسترسی افقی	20.1 m
Up and over clearance	فضای باز مورد نیاز	17.5 m
Below ground reach	دسترسی پایین تر از سطح زمین	1.5 m
Lift capacity	ظرفیت بالابری	230 kg (2 pers.)
F x G Platform size	ابعاد سبد	2.44 x 0.91 m
H Length - stowed	طول-در حالت جمع شده	13.1 m
A Storage / transport length	طول-در حالت حمل و نقل	11 m
B Width	عرض دستگاه	2.53 m
Width - with extended axles	عرض دستگاه-در زمان باز بودن اکسل ها	3.3 m
C Height - stowed	ارتفاع-در حالت جمع شده	2.99 m
J Storage / transport height	ارتفاع-در حالت حمل و نقل	3.73 m
Vertical jib rotation	چرخش عمودی جیب	140° (+ 70° / - 70°)
Platform rotation	چرخش سبد	180° (+ 90° / - 90°)
Turntable rotation	چرخش صفحه گردان	360° continuous
Tailswing	شعاع چرخش دم	3.88 m
D Wheelbase	فاصله چرخ ها	3.5 m
E Ground clearance	فاصله باز دستگاه تا زمین	38 cm
Tilt	زاویه شبیب	4 °
Maximum wind speed rating	حداکثر سرعت مجاز باد برای کار	45 km/h
Gradeability	قابلیت حرکت در شبیب	40 %
Turning radius - outside axle extended	شعاع چرخش در زمان باز بودن اکسل	5.74 m
Tyres - foam-filled	لاتستیک	445 / 65 - 22.5
Power source	منبع تغذیه	Deutz, 55 kW, Turbo (Stage 5 in EU) - Perkins, 62.5 kW, Turbo (Stage 3A in NRC)
Weight	وزن دستگاه	23 900 kg

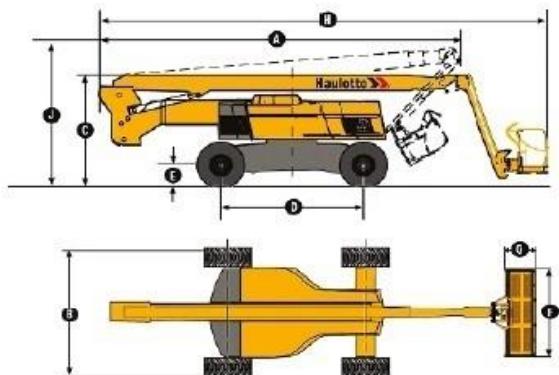


### STANDARD EQUIPMENT

- > Haulotte Activ'Shield Bar 2.0
- > Universal telematics plug
- > 4 wheel drive and steer
- > Front oscillating axle increasing stability on uneven ground
- > 2 extendable axles
- > Proportional controls enhancing comfort and safety
- > 4 simultaneous movements for highest productivity
- > Differential wheel lock increasing rough terrain capacity
- > Upper control box protection cover and tool tray in plastic ultra-solid
- > Common modular large platform with drop bar entry gate
- > Basket compensation ± 10°
- > Power to platform 110 V / 220 V (female plug in the basket)
- > Enhanced Swing out engine tray for ease of maintenance
- > Sound and light alarm for tilt and load
- > Driving beacon
- > Travel alarm
- > Electric pump system and emergency descent controls upper control box
- > 12 V battery
- > Engine pre-heater with light indicator
- > Low fuel level indicator (upper control box)
- > Towing hooks
- > Hydrostatic transmission

### OPTIONS AND ACCESSORIES

- > Air line to platform
- > Lateral swing door gate
- > On-board hydraulic 3.5 kW generator
- > Biodegradable hydraulic oil
- > Hydraulic oil cooler
- > Cap with key for diesel tank
- > Hydraulic oil in tank and circuit for warm countries
- > Cold weather kit
- > Pipe cradle pack
- > Glazier Pack
- > Automatic Overspeed Air Shutdown Valve (electric one-way valve, flame arrestor, spark arrester)
- > 55 W Platform working light

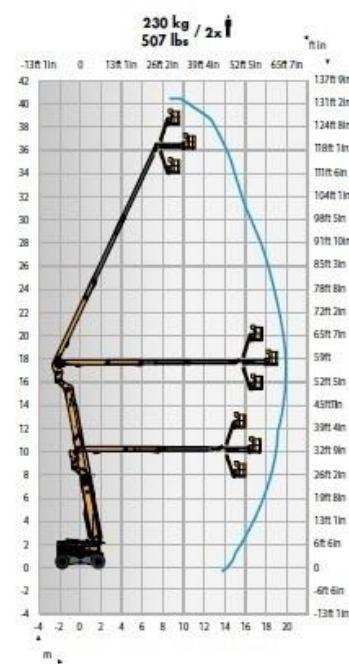

2420327910 We reserve the right to modify the technical characteristics of this document.